


Voltage Options

| VA | Primary Voltage | Frequency (Hz) | Secondary Voltage (RMS) | Dim. A | Notes |
|-----|-----------------|----------------|-------------------------|---------------------|--|
| 65 | 120 | 50/60 | 24 | 1.000" [25.40mm] | |
| | 120/208/240 | 50/60 | 24 | 1.125" [28.58mm] | Available only with opposite side termination |
| | 120/240 | 50/60 | 24 | 1.125" [28.58mm] | |
| | 208/240 | 50/60 | 24 | 1.000" [25.40mm] | |
| | 240 | 50/60 | 24 | 1.000" [25.40mm] | |
| | 480 | 50/60 | 24 | 1.000" [25.40mm] | |
| | 600 | 50/60 | 24 | 1.000" [25.40mm] | |
| 75 | 120 | 50/60 | 24 | 1.125" [28.58mm] | |
| | 120/208/240 | 50/60 | 24 | 1.250" [31.75mm] | Available only with opposite side termination |
| | 208/240 | 50/60 | 24 | 1.125" [28.58mm] | |
| | 240 | 50/60 | 24 | 1.125" [28.58mm] | |
| | 277 | 50/60 | 24 | 1.125" [28.58mm] | Available only with circuit breaker protection and same side termination |
| | 400 | 50/60 | 24 | 1.125" [28.58mm] | Available only with circuit breaker protection and same side termination |
| | 480 | 50/60 | 24 | 1.125" [28.58mm] | |
| | 600 | 50/60 | 24 | 1.125" [28.58mm] | |
| 100 | 120 | 60 | 25 | 1.250" [31.75mm] | Available only with circuit breaker protection and same side termination |
| | 120/277 | 60 | 25 | 1.500" [38.10mm] | Available only with circuit breaker protection and same side termination |
| | 208/230 | 50/60 | 25 | 1.500" [38.10mm] | Available only with circuit breaker protection and same side termination |
| | 208/240 | 50/60 | 25 | 1.500" [38.10mm] | Available only with circuit breaker protection and same side termination |
| | 400 | 50/60 | 25 | 1.500" [38.10mm] | Available only with circuit breaker protection and same side termination |
| | 460/575 | 50/60 | 25 | 1.500" [38.10mm] | Available only with circuit breaker protection and same side termination |


Mounting Options

| Option | Dim. B | Dim. C | Dim. D | Dim. E |
|--------|---------------------|----------------------|---------------------|---------------------|
| 1 | 3.562" [90.48mm] | 4.000" [101.60mm] | 1.250" [31.75mm] | 0.625" [15.88mm] |


Leaded Termination Options for Fast Acting and Time Delay Fuse Protection

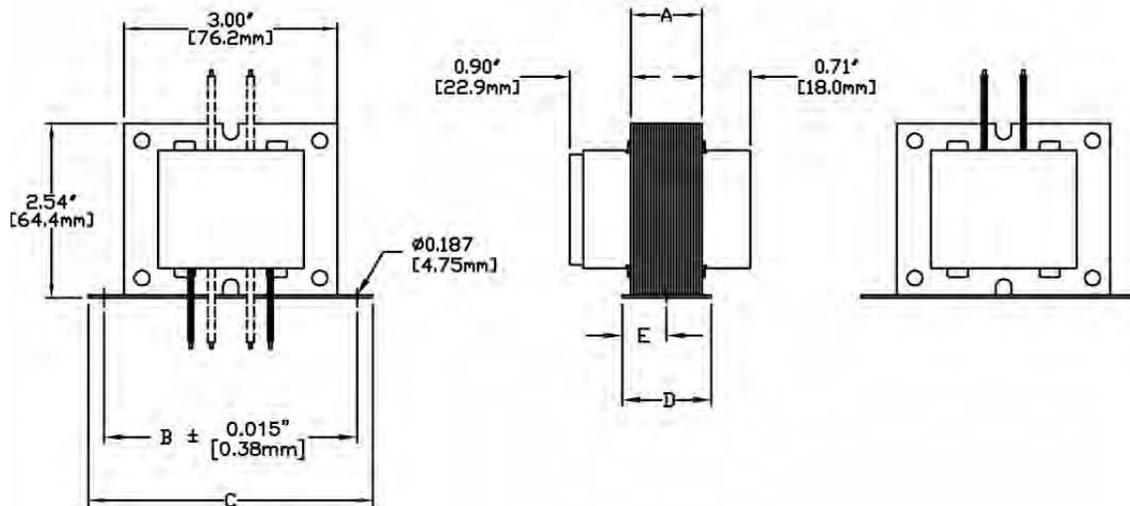

Quick Connect Termination Options for Fast Acting and Time Delay Fuse Protection

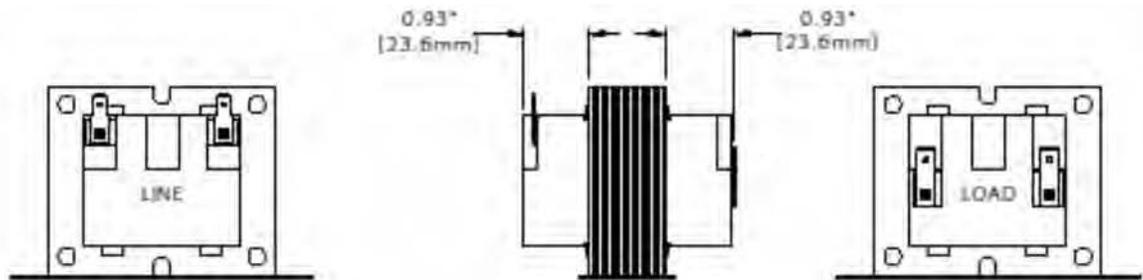

Quick Connect Termination Options for Resettable Circuit Breaker Protection

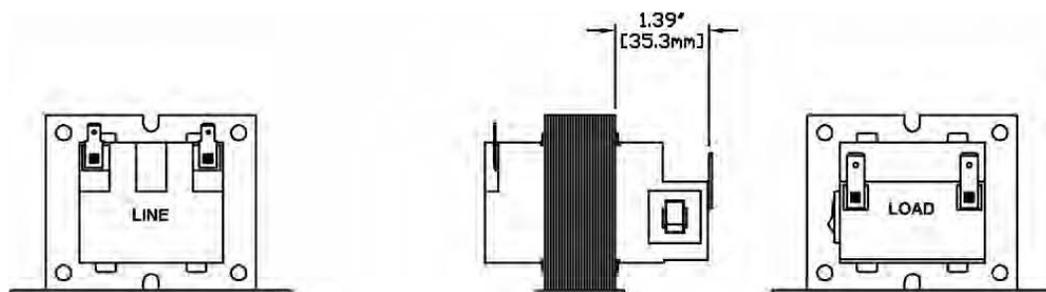

Same side termination option is available.