

Basler Electric Class 2 Transformers - Group C - 3/4" Frame Size

Voltage Options


VA	Primary Voltage	Frequency (Hz)	Secondary Voltage (RMS)	Dim. A	Dim. B	Notes
30	120	50/60	24	1.000" [25.40mm]	2.28" [57.9mm]	
	208/240	50/60	24	1.000" [25.40mm]	2.28" [57.9mm]	
	240	50/60	24	1.000" [25.40mm]	2.28" [57.9mm]	
	277	60	24	1.000" [25.40mm]	2.28" [57.9mm]	
40	120	60*	24	1.000" [25.40mm]	2.28" [57.9mm]	
	120/208/240	60	24	1.250" [31.75mm]	2.53" [64.3mm]	Leaded termination option only available on opposite sides
	120/240	60	24	1.250" [31.75mm]	2.53" [64.3mm]	
	208/240	60*	24	1.000" [25.40mm]	2.28" [57.9mm]	
	240	60*	24	1.000" [25.40mm]	2.28" [57.9mm]	
	460	50/60	24	1.250" [31.75mm]	2.53" [64.3mm]	
50	120	60	24	1.250" [31.75mm]	2.53" [64.3mm]	
	208/240	60	24	1.250" [31.75mm]	2.53" [64.3mm]	
	240	60	24	1.250" [31.75mm]	2.53" [64.3mm]	

* Denotes 50/60 Hz also available. Add 0.250" [6.35mm] to dimension A.


Mounting Options

Option	Dim. C	Dim. D
1	2.812" [71.42mm]	3.250" [82.55mm]
2	3.125" [79.38mm]	3.562" [90.47mm]

Leaded Termination Options

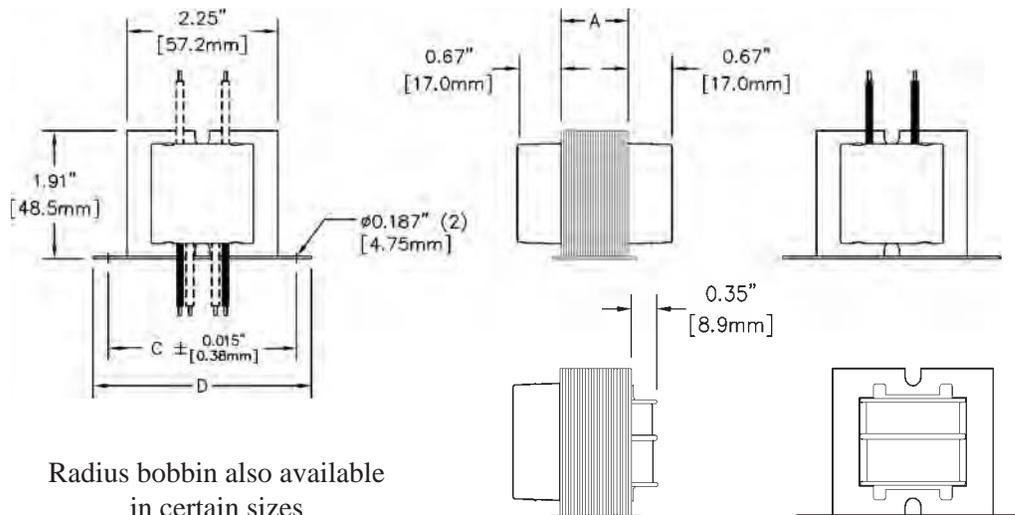


Quick Connect Termination Options (Flat Plate)

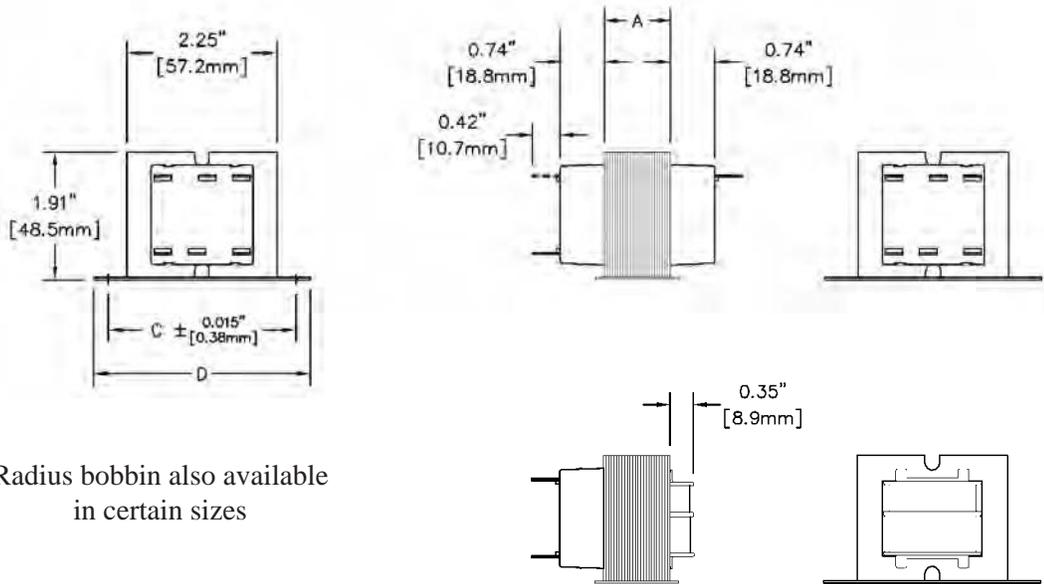

Radius bobbin also available
in certain sizes

Quick Connect Termination Options (Laydown Plate)

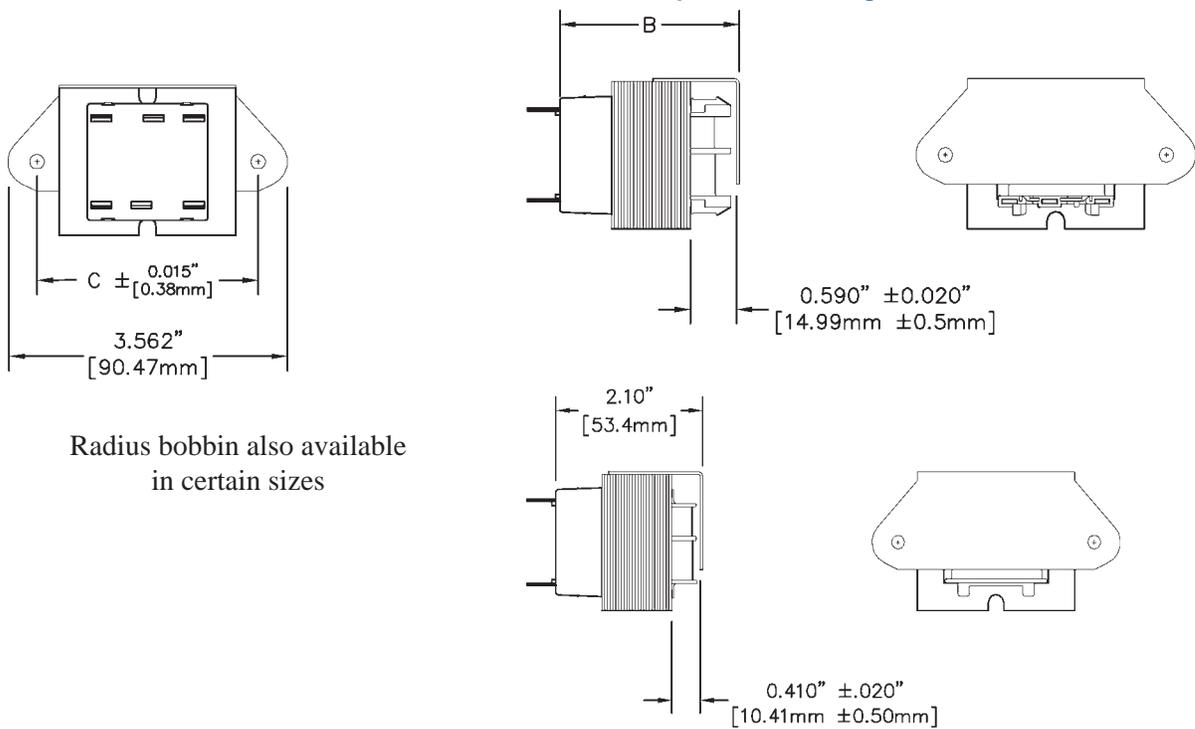

Radius bobbin also available
in certain sizes