


## Voltage Options

VA	Primary Voltage	Frequency [Hz]	Secondary Voltage [RMS]	Dimensions	
				A	B
5	120	60	12	0.375" [9.53mm]	1.38" [34.9mm]
			24		
10	120	60	12	0.500" [12.7mm]	1.50" [38.1mm]
			24		
	240	50/60	12	0.625" [15.88mm]	1.63" [41.3mm]
			24		
15	120	60	12	0.625" [15.88mm]	1.63" [41.3mm]
			24		
	240	50/60	12	0.750" [19.05mm]	1.75" [44.5mm]
			24		
20	120	60	12	0.875" [22.23mm]	1.88" [47.6mm]
			24		
	240	50/60	12	1.000" [25.40mm]	2.00" [50.8mm]
			24		
25	120	60	24	1.125" [28.58mm]	2.13" [54.0mm]
	240	50/60	24	1.250" [31.75mm]	2.25" [57.2mm]

## Mounting Options

Option	Dim. C	Dim. D
1	2.375" [60.33mm]	2.812" [71.42mm]
2	2.812" [71.42mm]	3.250" [82.55mm]
3	No plate	No plate

## Leaded Termination Options

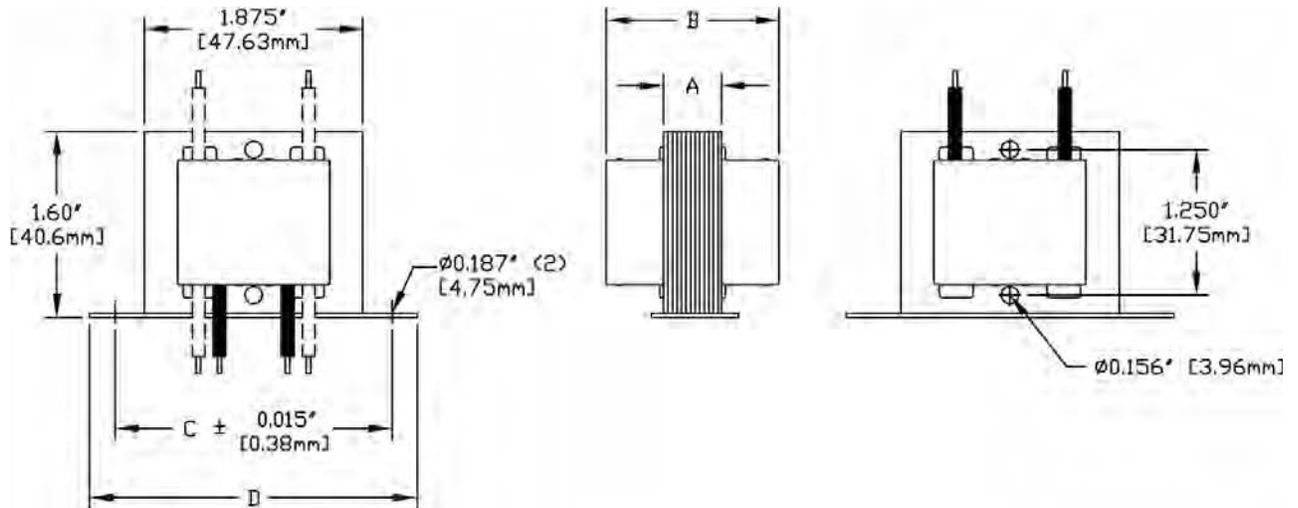

## Quick Connect Termination Options

