


Voltage Options

VA	Primary Voltage	Frequency (Hz)	Secondary Voltage (RMS)	Dimensions			
				A	B		
					Leads	Quick Connect same side	Quick Connect opposite sides
40	120	50/60	24	.750" [19.05mm]	2.00" [50.8mm]	2.22" [56.3mm]	2.56" [65.0mm]
	208/240	50/60	24	.750" [19.05mm]	2.00" [50.8mm]	2.22" [56.3mm]	2.56" [65.0mm]
	240	50/60	24	.750" [19.05mm]	2.00" [50.8mm]	2.22" [56.3mm]	2.56" [65.0mm]
45	120	50/60	24	1.000" [25.40mm]	2.25" [57.2mm]	2.47" [62.7mm]	2.81" [71.4mm]
	208/240	50/60	24	1.000" [25.40mm]	2.25" [57.2mm]	2.47" [62.7mm]	2.81" [71.4mm]
	240	50/60	24	1.000" [25.40mm]	2.25" [57.2mm]	2.47" [62.7mm]	2.81" [71.4mm]
50	120	50/60	24	1.125" [28.58mm]	2.38" [60.5mm]	2.59" [65.9mm]	2.94" [74.6mm]
	208/240	50/60	24	1.125" [28.58mm]	2.38" [60.5mm]	2.59" [65.9mm]	2.94" [74.6mm]
	240	50/60	24	1.125" [28.58mm]	2.38" [60.5mm]	2.59" [65.9mm]	2.94" [74.6mm]


Mounting Options

Option	Dim. C	Dim. D
1	3.125" [79.37mm]	3.562" [90.47mm]
2	No plate	No plate

Leaded Termination Options

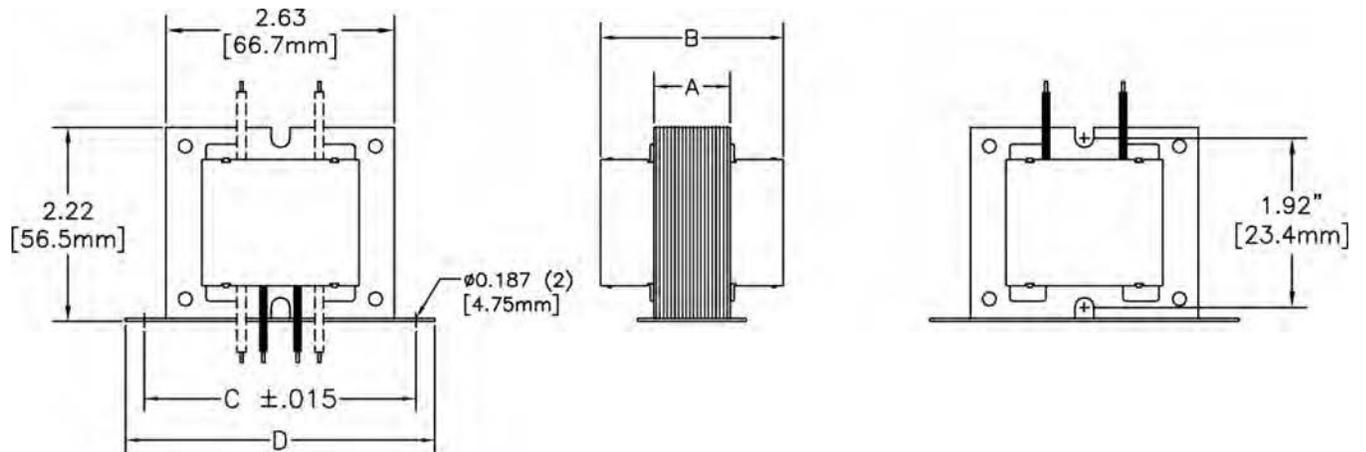

Quick Connect Termination (Same Side)

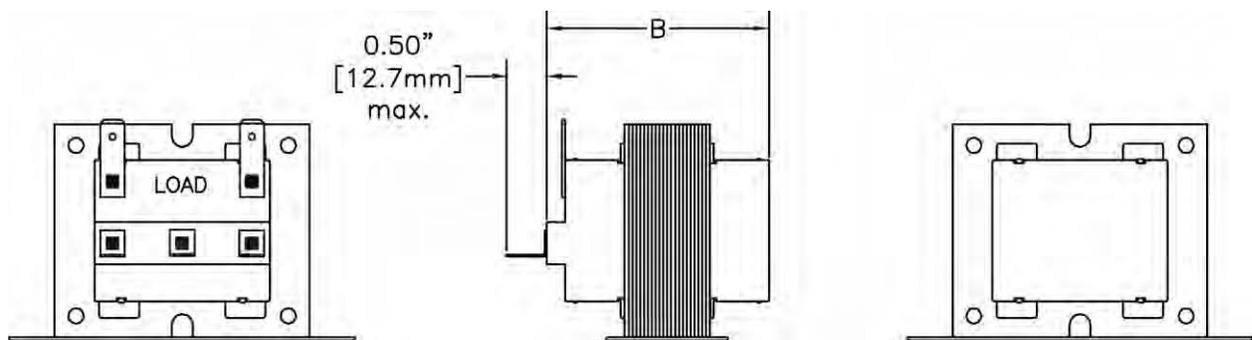

Quick Connect Termination (Opposite Side)

